

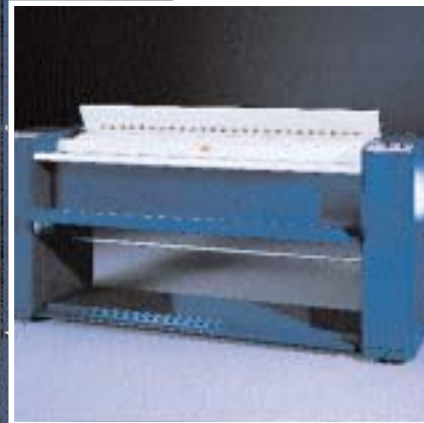


Miele's rotary ironer programme range

Miele
PROFESSIONAL

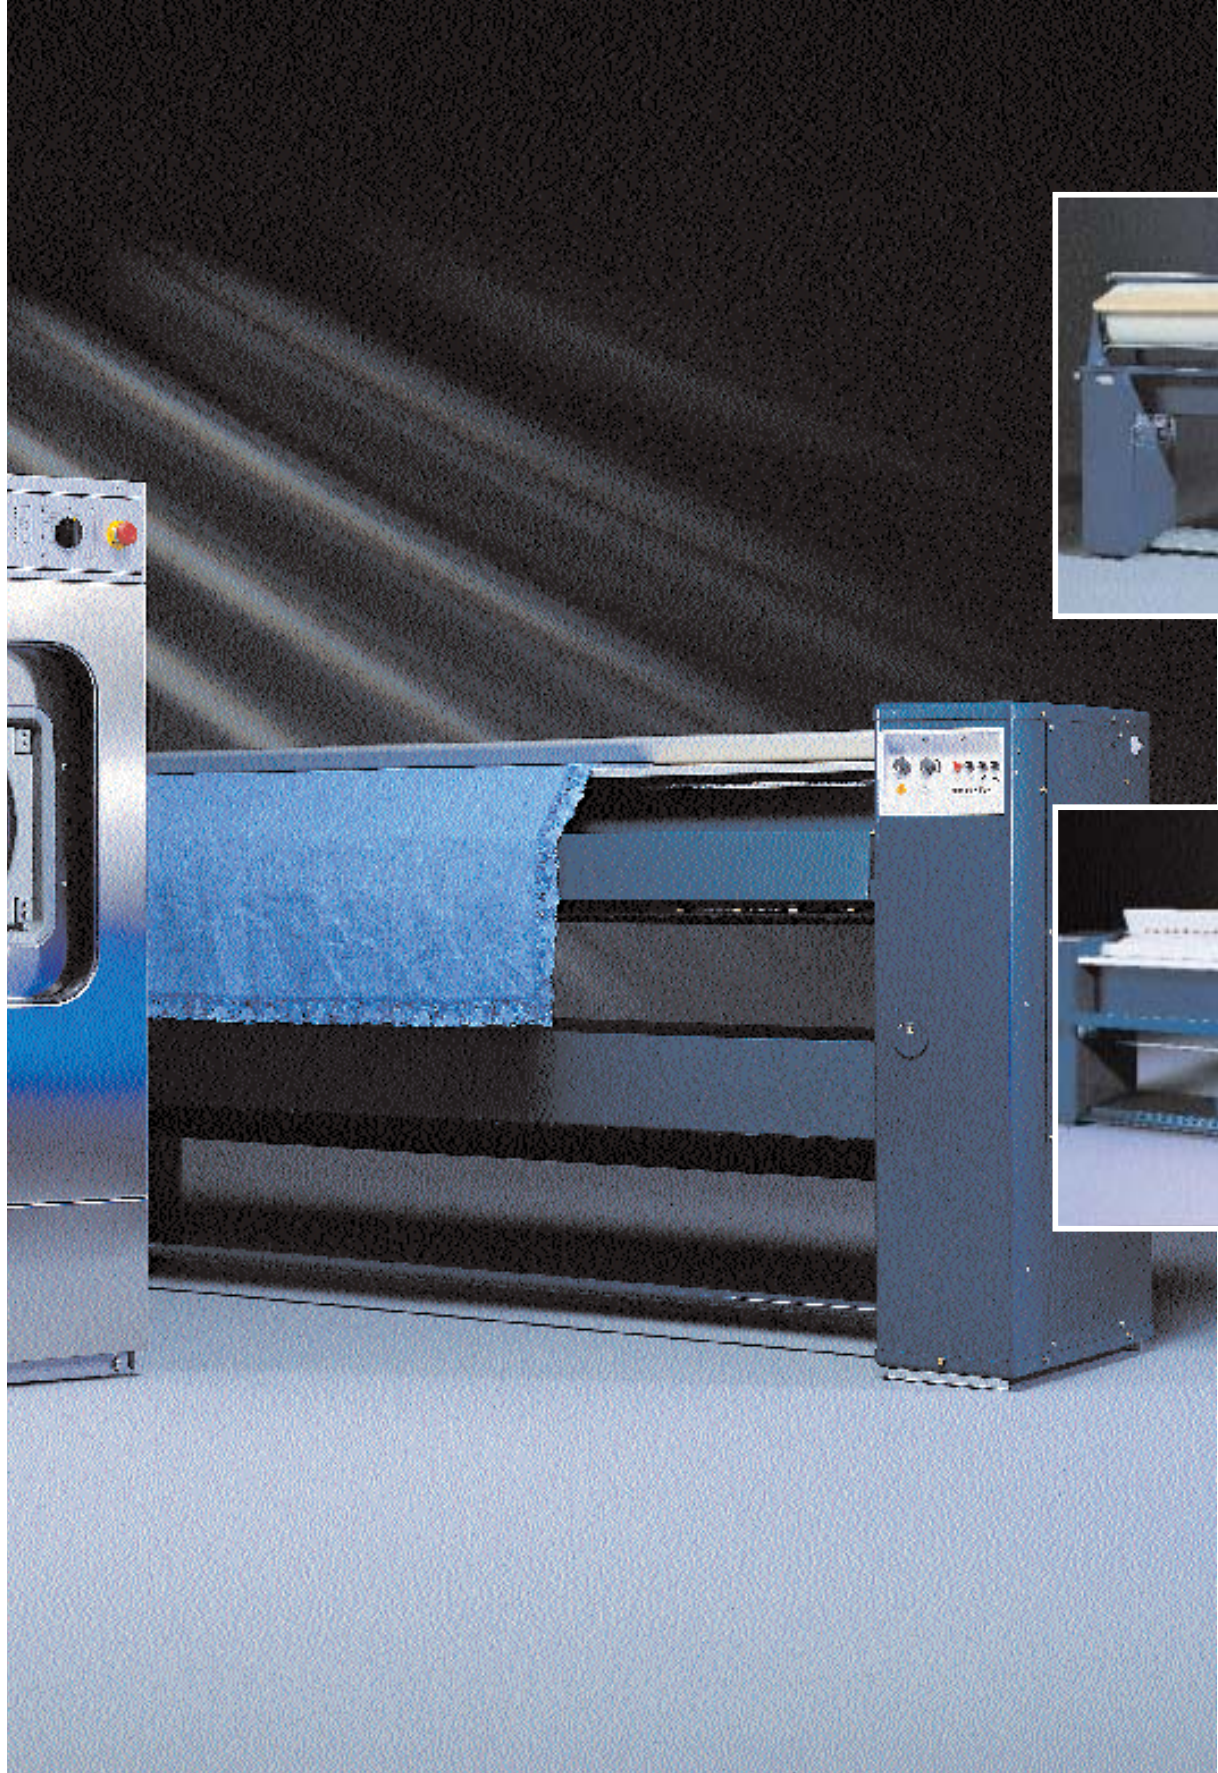


Miele HM 21-100 and HM 21-140 rotary ironers

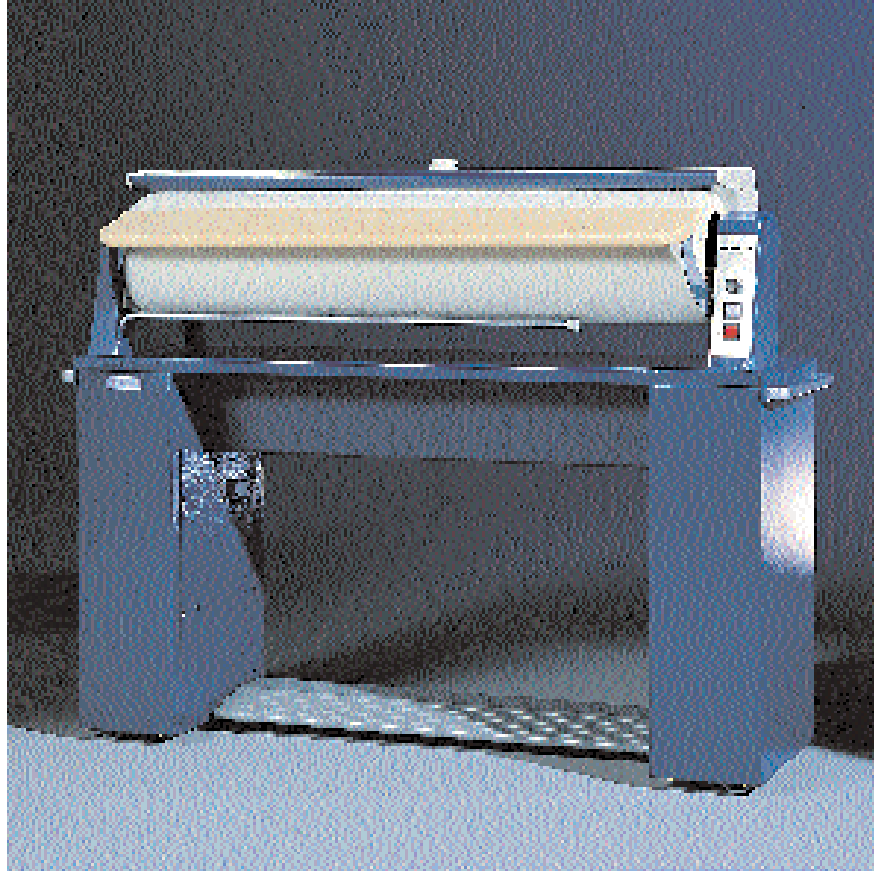

HM 21-100 rotary ironer	
Roller diameter	210 mm
Roller length	1005 mm
Linear speed	1.3–3.5 m/min
Roller speed	2.0–5.3 rpm
Laundry throughput Based on 25% initial residual moisture*	approx. 14 kg/h
Heating/heater rating Electric (EL)	4.4 kW
Dimensions:	
Height	986 mm
Width	1280 mm
Depth	415 mm
Net weight	77 kg
Electrical connection	3 N AC 380–415 V 50–60 Hz
Convertible to	1 AC 220–240 V 50–60 Hz
Fuse rating (EL)	3 x 16/1 x 16 A
Total rated load	4.55 kW
* According to DIN 11902: – Based on 25% or 40% initial residual moisture, dried to 0% – Referring to sheets, i.e. 175 g/m ² – Heater plate temperature of approx. 180°C – Items fed through in direct succession – 80% of roller width covered	

Miele HM 5316 rotary ironer

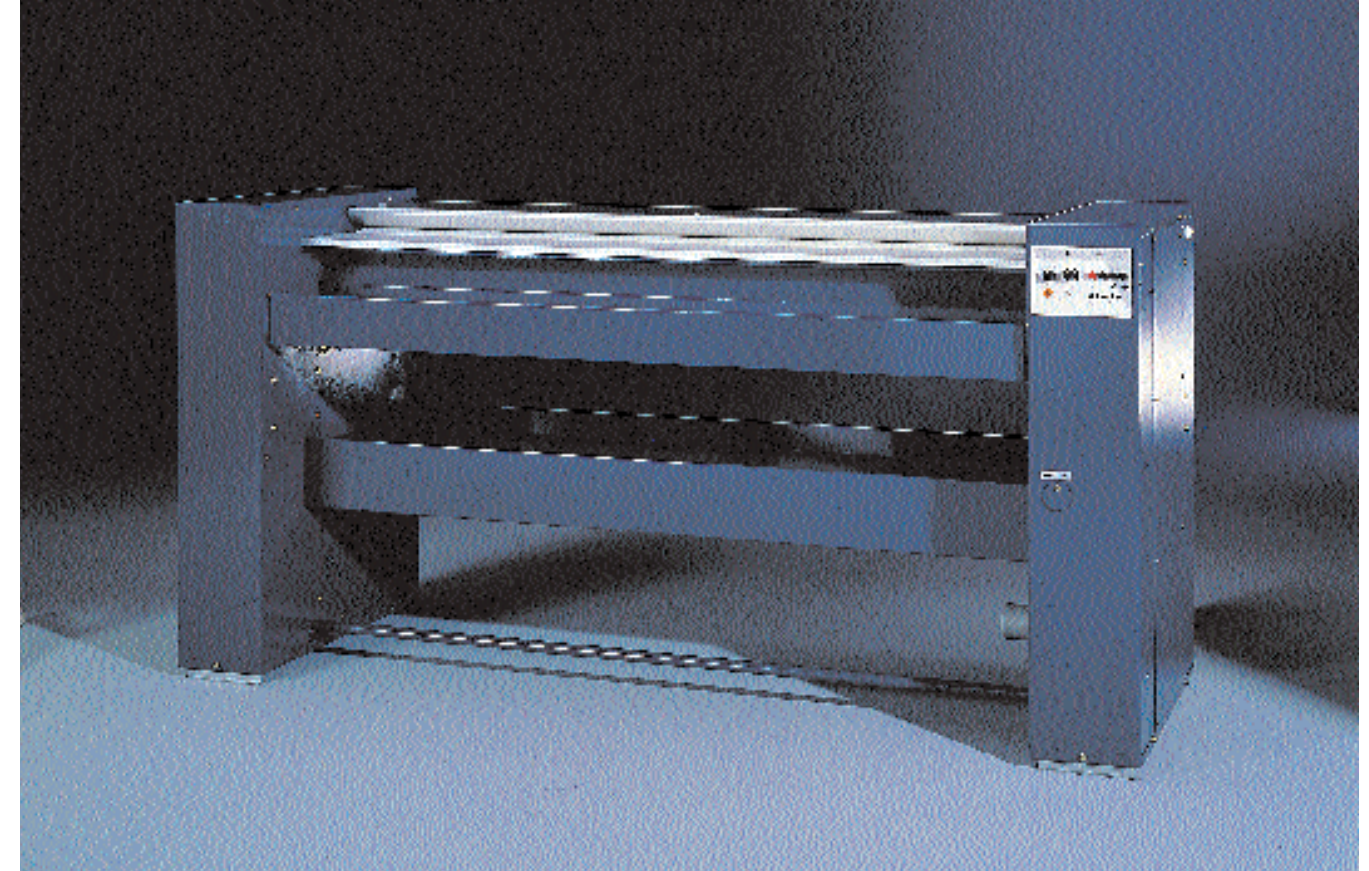


HM 21-140 rotary ironer	
Roller diameter	210 mm
Roller length	1395 mm
Linear speed	1.8–5.7 m/min
Roller speed	2.7–8.6 rpm
Laundry throughput Based on 25% initial residual moisture*	approx. 27 kg/h
Heating/heater rating Electric (EL)	6.5 kW
Dimensions:	
Height	1055 mm
Width	1644 mm
Depth	670 mm
Net weight	117 kg
Electrical connection	3 N AC 380–415 V 50 Hz
Convertible to	3 AC 220–240 V 50 Hz
Fuse rating (EL)	3 x 16/3 x 20 A
Total rated load	6.9 kW
* According to DIN 11902: – Based on 25% or 40% initial residual moisture, dried to 0% – Referring to sheets, i.e. 175 g/m ² – Heater plate temperature of approx. 180°C – Items fed through in direct succession – 80% of roller width covered	

HM 5316 rotary ironer	
Roller diameter	250 mm
Roller length	1650 mm
Linear speed	1.2–3.9 m/min
Roller speed	1.5–5.0 rpm
Laundry throughput Based on 25% initial residual moisture*	approx. 47 kg/h
Heating/heater rating Electric (EL)	11 kW
Dimensions:	
Height	1040 mm
Width	2160 mm
Depth	590 mm
Net weight	216 kg
Electrical connection	3 N AC 380–400 V 50 Hz
Convertible to	3 AC 220–230 V 50 Hz
Fuse rating (EL)	3 x 20/3 x 35 A
Total rated load	11.9 kW
* According to DIN 11902: – Based on 25% or 40% initial residual moisture, dried to 0% – Referring to sheets, i.e. 175 g/m ² – Heater plate temperature of approx. 180°C – Items fed through in direct succession – 80% of roller width covered	

United Kingdom
Miele Company Ltd.
 Fairacres, Marcham Road
 Abingdon, Oxon OX14 1TW
 Telephone: (01 35) 23 31 50
 Telefax: (01 35) 23 35 29

Australia
Miele Australia Pty. Ltd.
A. C. N. 005 635 398
 1 Gilbert Park Drive
 Knoxfield VIC 3180
 Telephone: (03) 97 64 71 30
 Telefax: (03) 97 64 71 49

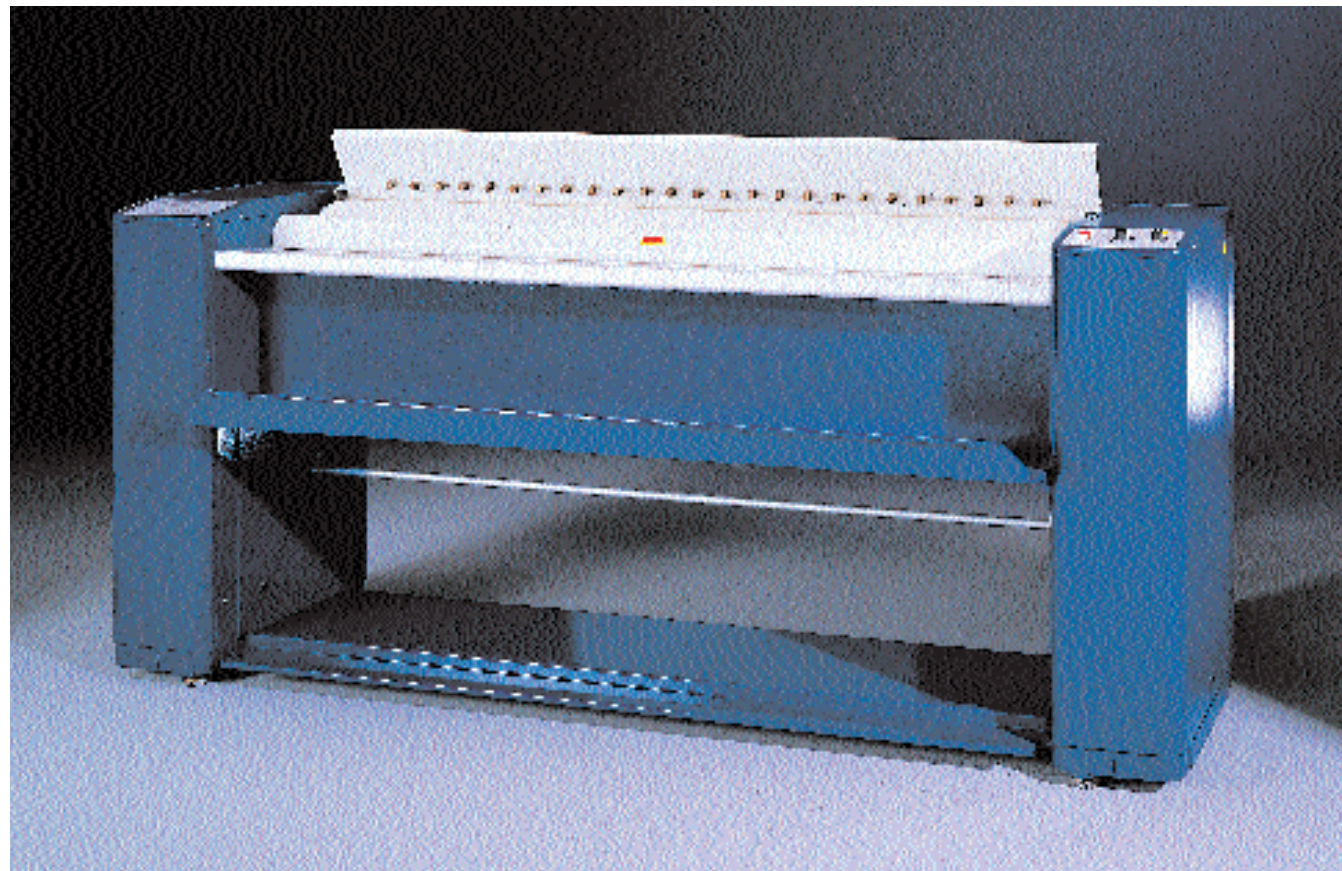

Technical data		HM 29-175 (EL)	HM 29-175 (G)
Roller diameter	mm	300	300
Roller length	mm	1750	1750
Heater trough		Aluminium	Aluminium
Linear speed	m/min	1.2-4.9	1.2-4.9
Roller speed	rpm	1.3-5.2	1.3-5.2
Laundry throughput			
Based on 25% initial residual moisture*		56	56
Heating/heater rating			
Electric (EL)	kW	16.5	-
Gas (G)	kW	-	20.0
High-pressure steam (HP)	kW	-	-
Dimensions:			
Height	mm	1060	1060
Width	mm	2400	2400
Depth	mm	1440	1440
Weight	kg	300	365
Connection		3 N AC 380-415 V 50 Hz	3 N AC 380-415 V 50 Hz
Convertible to		-	-
Fuse rating (EL) (G)	A	3 x 35	3 x 10
Total rated load	kW	17.05	1.0

* According to DIN 11902:

- Based on 25% or 40% initial residual moisture, dried to 0%
 - Referring to sheets, i.e. 175 g/m²
 - Heater plate temperature of approx. 180°C

- Items fed through in direct succession
 - 80% of roller width covered